



KEY FEATURES

- Cable-free hydraulic boom extension for smooth 'point and shoot' functionality
- Industry-leading unrestricted side reach and 360 degree stability
- Oversized two-person steel work platform with EZR quick connect system and platform stowed jib winch
- Electric/Hydraulic upper controls for smooth and precise operation
- Full length subframe with hydraulic outriggers for excellent stability and long chassis life



EZR Work Platform

40" x 60" steel platform with skid-resistant aluminum floor. Removable for lifting loads with the main winch and boom tip sheave.



Material Handling Main Winch

Elliott's 2,000 lb main winch option allows lifting loads with the work platform attached or removed, increasing lifting versatility.



Oversized Cable Carrier

Reliably carries hydraulic, electric, welding, oxy/acetylene, air and other accessory lines to the work platform.



Compact, Versatile Design

Engineered to be installed on a 19,500 lb GVWR truck with a narrow outrigger spread to work in tight spaces.

OTHER FEATURES


- **Stowable Platform Jib Winch:** Equip your HiReach platform with Elliott's unique jib winch that stows in the platform and features an extendable boom and mast to lengthen your reach and reduce setup times.
- **Hydraulic System:** Hydraulically powered continuous rotation mechanism. Holding valves on all cylinders. 12V Emergency pump.
- **Control System:** Manual hydraulic controls mounted on turret. Electronic proportional three-stick remote controls in work platform with hi-lo range for smooth operation in tight spaces. Includes remote engine start/stop, engine speed, and emergency stop switch.
- **Outriggers:** "A" type hydraulically powered main and behind cab outriggers.
- **Certification:** Certified to ANSI A92.2 for Vehicle-Mounted Elevating and Rotating Aerial Devices.

*Specifications are subject to change.

**MAXIMUM WORKING LOADS
PLATFORM AND JIB OPERATION**

MAX PLATFORM CAPACITY: 500 LBS MAX JIB CAPACITY: 500 LBS

TOTAL PLATFORM CAPACITY DIAGRAM (PERSONNEL PLUS JIB LOAD)

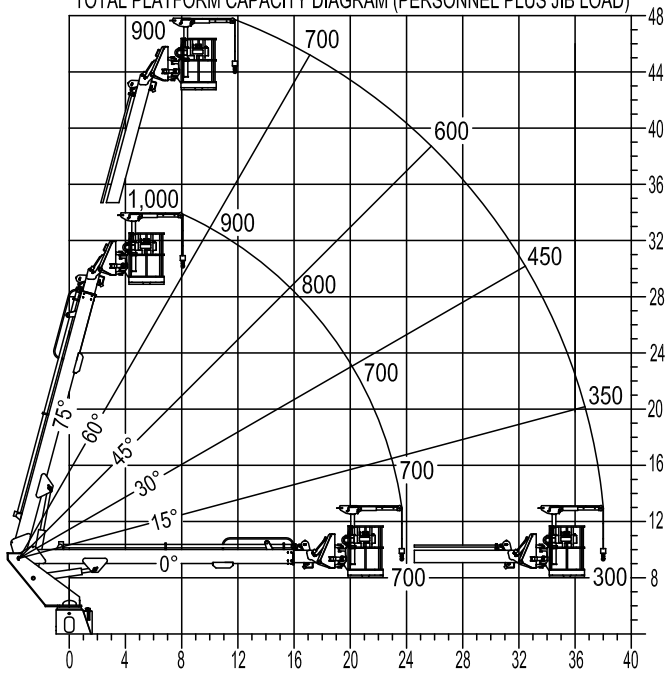

USE OUTRIGGERS AT ALL TIMES · AVOID JERKING LOADS · 360° RADIUS

DO NOT PAINT OVER ANY LABELS

1219500 120516

TECHNICAL SPECIFICATIONS

Working Height	48' / 14,6 m
Side Reach	38' / 11,6 m
Platform Capacity	500 lb / 227 kg
Platform Size	40" x 60" / 102 x152 cm
Main Winch Capacity	2,000 lb / 907 kg
Jib Winch Capacity	500 lb / 227 kg
Front Outrigger Spread	10'1" / 3,1 m
Rear Outrigger Spread	10'1" / 3,1 m
Minimum GVWR	19,500 lb / 8845 kg

AVAILABLE OPTIONS

- 500 lb. Capacity Stowable Jib Winch in the Work Platform
- 2,000 lb. Capacity Material Handling Main Winch
- 110V Lines, Welding Leads, Oxy/Acetylene Leads, Air Lines, Water Lines and More to the Work Platform
- (2) Sign Forks on the Work Platform
- Walkway Access to the Work Platform with the Boom Stowed
- Steel, Wood, or Aluminum Flatbeds
- Various Rear Bumper Styles
- Steel or Aluminum Toolboxes
- Composite or Wooden Outrigger Pads
- Spanish/Metric Charts
- Paint White, Red or Custom Colors
- Much More...